

PIVOTA® Fully Concealed & Adjustable Hinge

PIVOTA® DX 300 3D



Hinge Description

Pivota Fully Concealed and adjustable hinge, suitable for use on non-rebated flush doors, suitable for use on Timber, Steel and Aluminium Door Systems, complete with Cover Plates

PIVOTA®

B/a/S/y/s
Bartels Systembeschläge GmbH

Technical Details


Load Capacity	300 kg (per pair)
Overall Length (Door / Frame)	270mm
Overall Width (Door / Frame)	28mm / 30mm
Maximum Opening Angle	180 °
Minimum Door Thickness	44mm
Adjustability	3 Dimensional (Side, Height, Compression)

Available Accessories


Receiver Plate for Steel Frame
Hinge Retainer Plate for Casing and Steel Frames

Installation Accessories

Universal Routing Kit
Router Template (2 Part Door & Frame)
Intumescent Kit (White or Black)

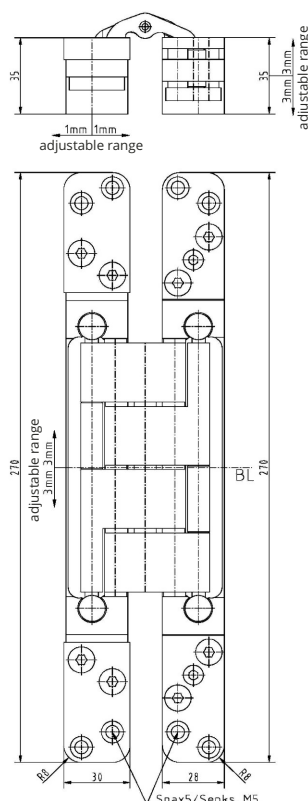

Section drawing

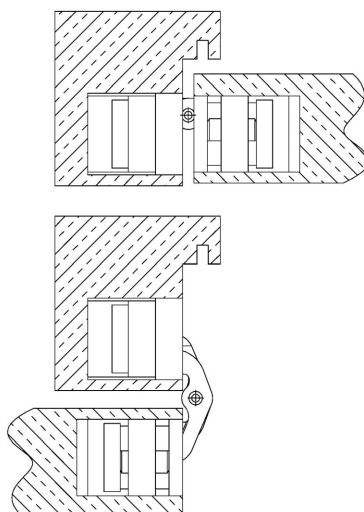


PRODUCT CODE:
Pivota DX300 3D

MIN DOOR THICKNESS:
44 mm

MAX ADJUSTABLE DOOR WEIGHT:
300 kg (per pair)

FR DETAIL:
FD30 FD60



Standard finishes available

Code	Finish
SNP	Satin Nickel
SSS	Simulated Stainless

Full range of decorative finishes available

