

PIVOTA® Fully Concealed & Adjustable Hinge

PIVOTA® DX 61 3D DESIGN PLUS



Hinge Description

Pivota Fully Concealed and adjustable hinge, suitable for use on non-rebated flush doors, suitable for use on Timber, Steel and Aluminium Door Systems, complete with Improved Cover Plates.

PIVOTA®

B/a/S/y/s
Bartels Systembeschläge GmbH



Technical Details

Load Capacity	100 kg (per pair)
Overall Length (Door / Frame)	180mm
Overall Width (Door / Frame)	30mm / 30mm
Maximum Opening Angle	180°
Minimum Door Thickness	44mm
Adjustability	3 Dimensional (Side, Height, Compression)


Available Accessories

Receiver Plate for Steel Frame
Hinge Retainer Plate for Casing and Steel Frames


Installation Accessories

Universal Routing Kit
Router Template Intumescent Kit (White or Black)

Also available as a Standard Version without Cover Plates

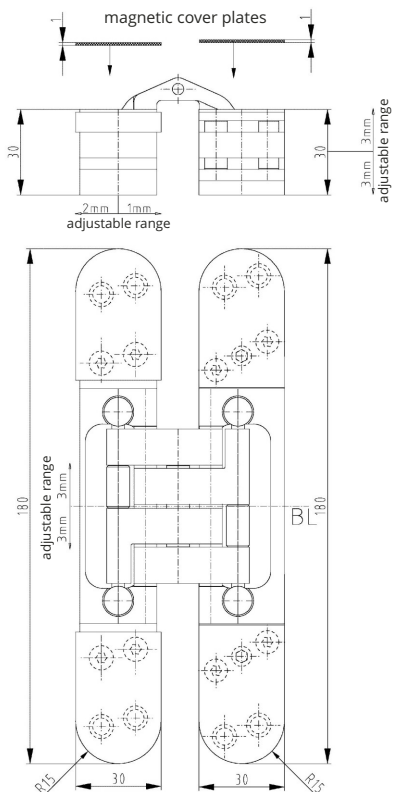

Section drawing

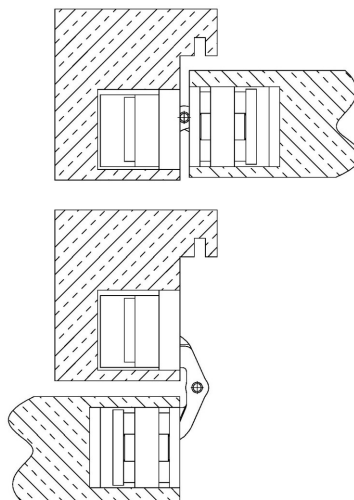

PRODUCT CODE:
Pivota DX61 3D Design

MIN DOOR THICKNESS:
44 mm

MAX ADJUSTABLE DOOR WEIGHT:
100 kg (per pair)

FR DETAIL:
FD30



Standard finishes available

Code	Finish
SNP	Satin Nickel
SSS	Simulated Stainless

Full range of decorative finishes available

