

Technical Product Datasheet


7730 - Concealed Bearing Hinge Range 76.2mm version - Fixed pin




HINGE FEATURES

- Fully concealed bearing design
- Integrated high performance bearings
- Maintenance free, low friction design
- Available in mild steel, 304 & 316 stainless steel
- 3 hinge widths available
- Tested to EN1935 : 2002 Grade 14
- Independently tested to 1,000,000 cycles
- Certifire approved
- Holes countersunk to suit No 12 w/screws or M6 m/c screws
- Full range of options and finishes available
- 25 year guarantee


FIXED PIN

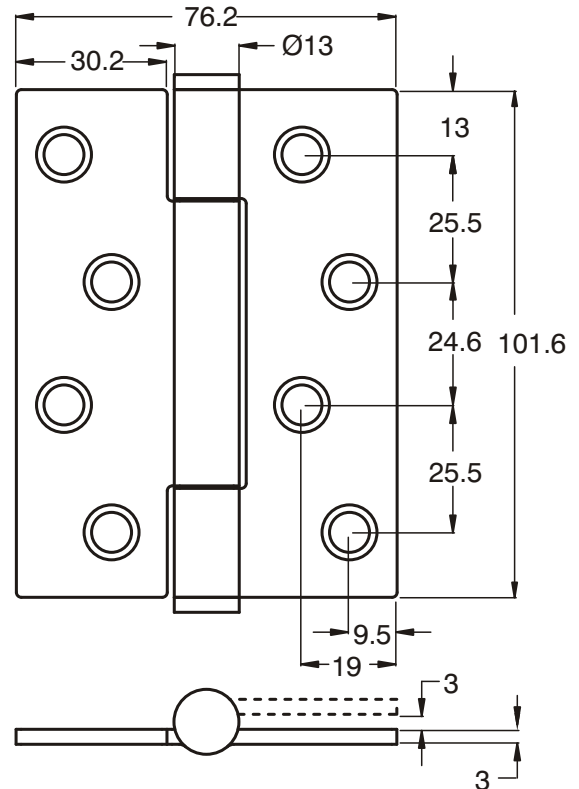


FURTHER OPTIONS




ANSI hole pattern
(Template drilled)




Radiused corners



Dog bolt

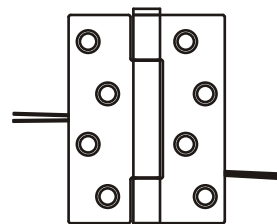

Conductor hinge



Anti-ligature hinge